

PGJ

Radius: **4.3 to 11.6 m**
 Flow: **0.13 to 1.23 m³/hr; 2.2 to 20.5 l/min**
 Inlet: **½"**

FEATURES

- Models: Shrub, 10 cm, 15 cm, 30 cm
- Arc setting: 40° to 360°
- Nozzle choices: 8
- Nozzle range: 0.75 to 5.0
- Standard factory installed nozzle: 2.0 only
- Factory installed rubber cover
- Through-the-top arc adjustment
- QuickCheck™ arc mechanism
- Water lubricated gear-drive
- Warranty period: 2 years
- ▶ Headed and slotted set screw
- ▶ Optional reclaimed water ID
- ▶ Drain check valve (up to 2 m of elevation)

OPERATING SPECIFICATIONS

- Radius: 4.3 to 11.6 m
- Flow: 0.13 to 1.23 m³/hr; 2.2 to 20.5 l/min
- Recommended pressure range: 1.7 to 3.8 bar; 170 to 380 kPa
- Operating pressure range: 1.4 to 7.0 bar; 140 to 700 kPa
- Precipitation rates: 15 mm/hr approximately
- Nozzle trajectory: 15° approximately
- ▶ = *Advanced Feature descriptions on page 22*



PGJ Reclaimed
 Available as a factory installed option on all models

PGJ – SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1 Model	2 Standard Features	3 Feature Options
PGJ-00 = Shrub	Adjustable arc, 8 standard nozzles	(blank) = No option
PGJ-04 = 10 cm Pop-up		V = Drain check valve
PGJ-06 = 15 cm Pop-up		R = Drain check valve and reclaimed water ID (pop-up models only)
PGJ-12 = 30 cm Pop-up		

Examples:
 PGJ-04 = 10 cm Pop-up, adjustable arc
 PGJ-06 - V = 15 cm Pop-up, adjustable arc, with drain check valve
 PGJ-12 - R = 30 cm Pop-up, adjustable arc, with drain check valve and reclaimed water ID



PGJ-00
 Overall height: 18 cm
 Exposed diameter: 3 cm
 Inlet size: ½"



PGJ-04
 Overall height: 18 cm
 Pop-up height: 10 cm
 Exposed diameter: 3 cm
 Inlet size: ½"




PGJ-06
 Overall height: 23 cm
 Pop-up height: 15 cm
 Exposed diameter: 3 cm
 Inlet size: ½"



PGJ-12
 Overall height: 41 cm
 Pop-up height: 30 cm
 Exposed diameter: 3 cm
 Inlet size: ½"

PGJ RED NOZZLE PERFORMANCE DATA							
Nozzle	Pressure		Radius m	Flow		Precip mm/hr	
	bar	kPa		m ³ /hr	l/min	■	▲
.75 ● Red	1.7	170	4.3	0.13	2.2	14	17
	2.0	200	4.6	0.14	2.4	14	16
	2.5	250	4.9	0.16	2.7	13	15
	3.0	300	5.2	0.18	3.0	13	15
	3.5	350	5.2	0.19	3.2	14	17
	3.8	380	5.5	0.20	3.4	13	15
1.0 ● Red	1.7	170	5.2	0.18	3.0	13	15
	2.0	200	5.5	0.19	3.2	13	15
	2.5	250	5.5	0.21	3.5	14	16
	3.0	300	5.8	0.23	3.8	14	16
	3.5	350	5.8	0.24	4.1	15	17
	3.8	380	6.1	0.25	4.2	14	16
1.5 ● Red	1.7	170	6.1	0.27	4.5	15	17
	2.0	200	6.4	0.29	4.8	14	16
	2.5	250	6.4	0.32	5.4	16	18
	3.0	300	6.7	0.36	6.0	16	18
	3.5	350	6.7	0.39	6.4	17	20
	3.8	380	7.0	0.40	6.7	16	19
2.0 ● Red	1.7	170	7.0	0.34	5.6	14	16
	2.0	200	7.3	0.37	6.2	14	16
	2.5	250	7.3	0.42	7.1	16	18
	3.0	300	7.6	0.48	8.0	17	19
	3.5	350	7.6	0.53	8.8	18	21
	3.8	380	7.9	0.56	9.3	18	20
2.5 ● Red	1.7	170	7.9	0.46	7.6	15	17
	2.0	200	8.2	0.49	8.1	14	17
	2.5	250	8.2	0.54	9.0	16	18
	3.0	300	8.5	0.59	9.8	16	19
	3.5	350	8.5	0.63	10.5	17	20
	3.8	380	8.8	0.65	10.9	17	19
3.0 ● Red	1.7	170	8.8	0.51	8.5	13	15
	2.0	200	9.1	0.56	9.3	13	15
	2.5	250	9.1	0.64	10.6	15	18
	3.0	300	9.4	0.72	12.0	16	19
	3.5	350	9.4	0.78	13.1	18	20
	3.8	380	9.8	0.82	13.7	17	20
4.0 ● Red	1.7	170	9.8	0.80	13.3	17	19
	2.0	200	10.1	0.83	13.8	16	19
	2.5	250	10.1	0.89	14.8	18	20
	3.0	300	10.4	0.94	15.7	17	20
	3.5	350	10.4	0.98	16.3	18	21
	3.8	380	10.7	1.00	16.7	18	20
5.0 ● Red	1.7	170	10.7	1.02	17.0	18	21
	2.0	200	11.0	1.06	17.6	18	20
	2.5	250	11.0	1.11	18.5	18	21
	3.0	300	11.3	1.17	19.4	18	21
	3.5	350	11.3	1.21	20.1	19	22
	3.8	380	11.6	1.23	20.5	18	21

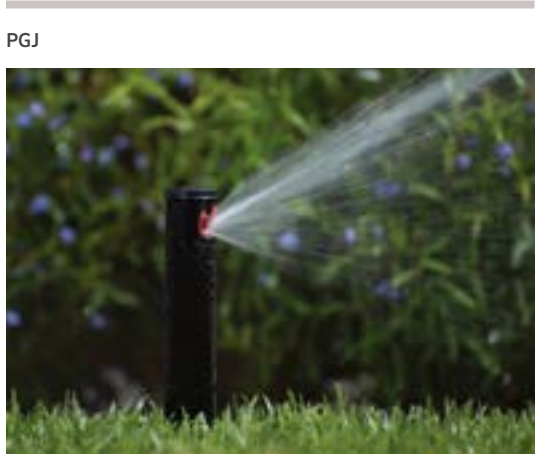

Note:

All precipitation rates calculated for 180° operation. For the precipitation rate for a 360° sprinkler, divide by 2.