

# Technical Specification


## AS 200/22/15 L

### 1) Mechanical properties of wires

	Top&Down wires	Horizontal wires	Vertical wires
<b>Diameters and tolerances</b>	2,00 mm ± 0,09mm	1,60mm ± 0,09mm	1,60mm ± 0,09mm
<b>Tensile strenght</b>	Min 400 MPa	Min 400 MPa	Min 400 MPa
<b>Zn coating according to EN 10244-2 Class A</b>	min. 50 g/m <sup>2</sup>	min. 50 g/m <sup>2</sup>	min. 50 g/m <sup>2</sup>

### 2) Horizontal wires layout (from bottom of the fence)

Mesh height	Tolerance	No. of meshes
50 mm	± 3,0mm	10
100 mm	± 3,0mm	6
150 mm	± 3,0mm	2
200 mm	± 3,0mm	3

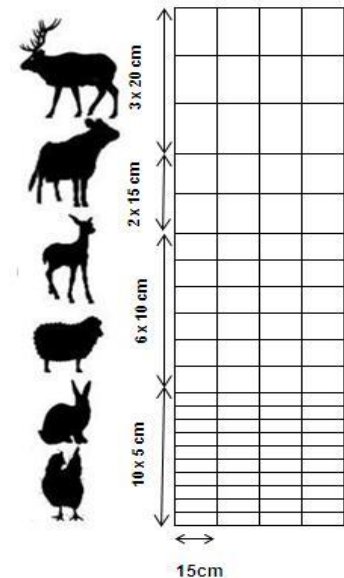

### 3) Distance between vertical wires: 150 mm (+-3 mm)

### 4) Length of the roll: 50 m (+2%, -0%)

### 5) Knot type:



200/22/15